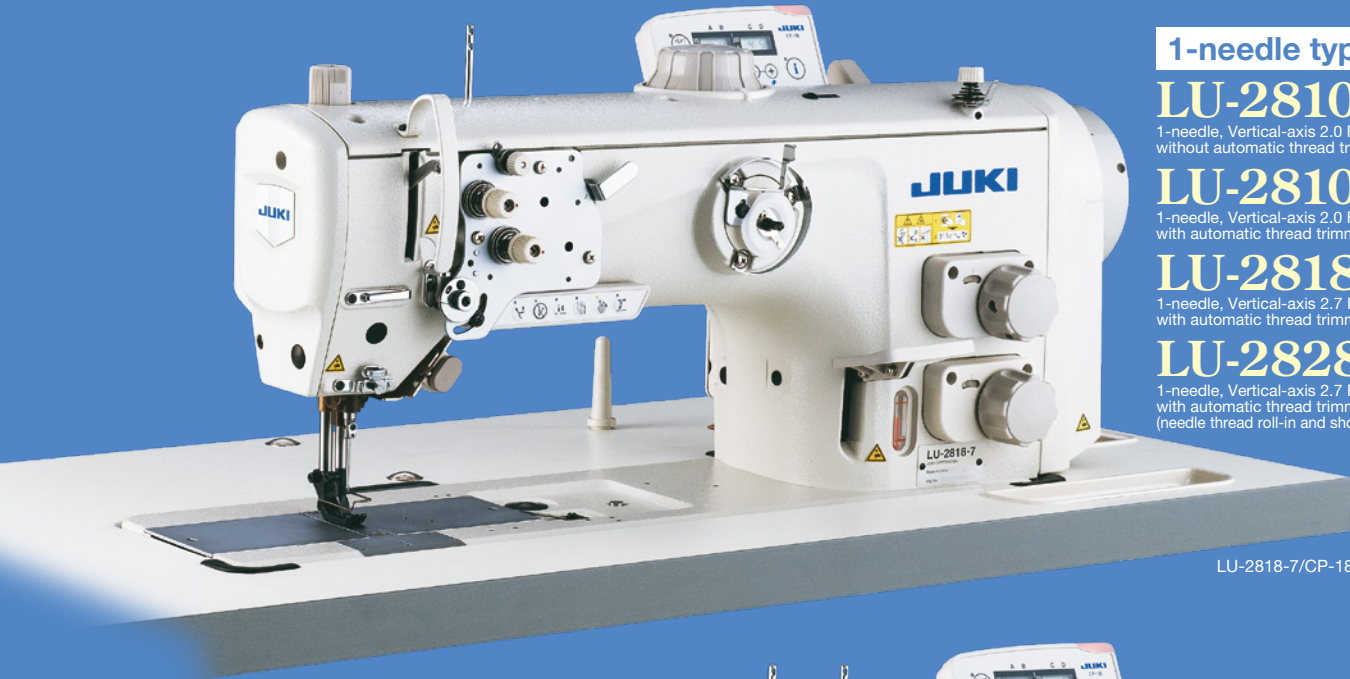


LU-2800 Series

Semi-dry, Unison-feed, Lockstitch Machine with Vertical-axis Large Hook

High and semi-long arm has been adopted.
The long distance from the machine arm to the needle contributes to improved workability.

The LU-2800 Series is a unison-feed, lockstitch machine with a vertical-axis large hook which is provided with substantially improved functions and performance.



1-needle type

LU-2810

1-needle, Vertical-axis 2.0 Fold-Capacity Hook without automatic thread trimmer

LU-2810-7

1-needle, Vertical-axis 2.0 Fold-Capacity Hook with automatic thread trimmer

LU-2818AL-7

1-needle, Vertical-axis 2.7 Fold-Capacity Hook with automatic thread trimmer (long-pitch type)

LU-2828A-7

1-needle, Vertical-axis 2.7 Fold-Capacity Hook with automatic thread trimmer (needle thread roll-in and shorter - thread remaining type)

LU-2818-7/CP-18

2-needle type

LU-2860

2-needle, Vertical-axis 2.0 Fold-Capacity Hook without automatic thread trimmer

LU-2860-7

2-needle, Vertical-axis 2.0 Fold-Capacity Hook with automatic thread trimmer

LU-2868AL-7

2-needle, Vertical-axis 2.7 Fold-Capacity Hook with automatic thread trimmer (long-pitch type)



LU-2868-7/CP-18

JUKI ECO PRODUCTS



This is an environmentally friendly product that meets the standards of JUKI ECO PRODUCTS.

- The sewing machine complies with the "Juki Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive.

For details of JUKI ECO PRODUCTS, refer to: <https://www.juki.co.jp/en/company/eco>

● The RoHS Directive is an EU Directive limiting the use of 6 hazardous substances (lead, hexavalent chromium, mercury, cadmium, PBB and PBDE) in electrical and electronic equipment. The Juki Green Procurement Guideline is the voluntarily established criteria to eliminate not only the aforementioned six substances, but also other ones which also adversely affect the environment.



MS
CM001



EMS
ISO14001
JSAE389

Registered Organization: JUKI CORPORATION Head Office
The Scope of the Registration: The activities of research, development, design, sales, distribution, and maintenance services of industrial sewing machines, household sewing machines and industrial robots, etc., including sales and maintenance services of data entry systems.

JUKI SEWING BUSINESS UNIT
2-11-1, TSURUMAKI, TAMA-SHI, TOKYO 206-8551, JAPAN
PHONE: (81) 42-357-2355 FAX: (81) 42-357-2274
<https://www.juki.co.jp/en>

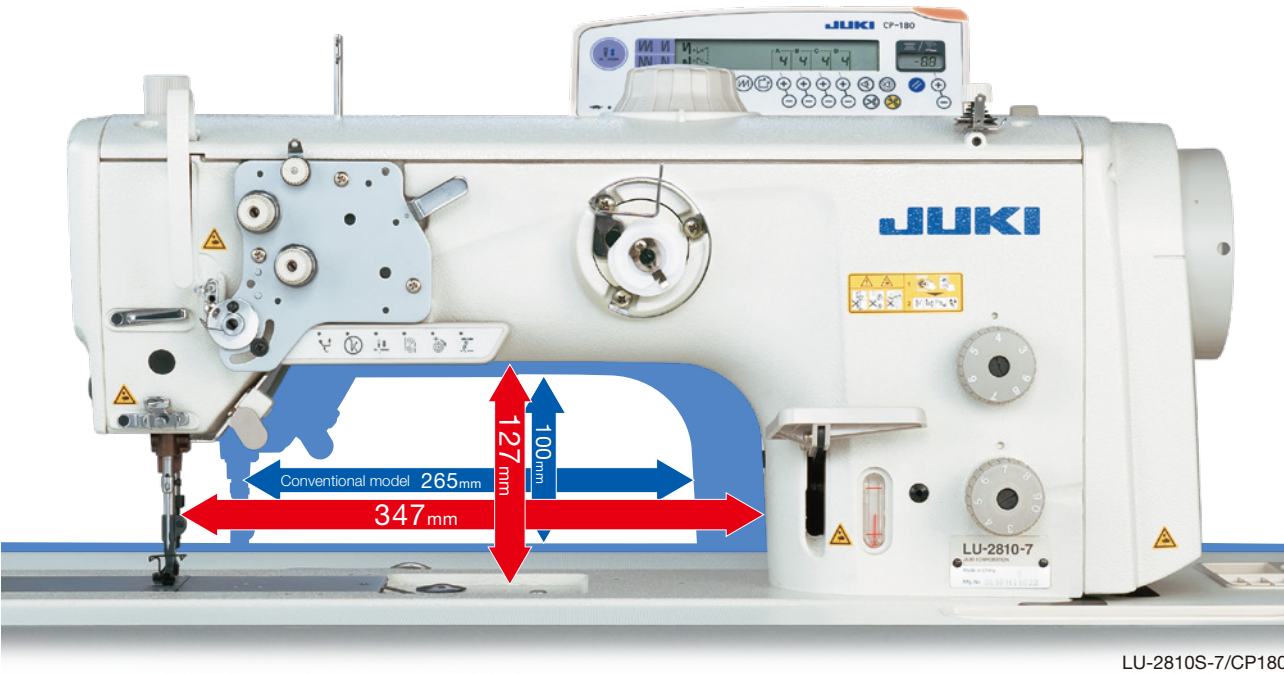
- Specifications and appearance may be changed without notice for improvement purposes.
- To ensure safe use, be sure to read the instruction manual before use.

The information in this catalog is current as of February 2026. (Rev01) (JC)

LU-2800 Series

Functions for improving seam quality and workability.

▶ The long distance from the machine arm to the needle contributes to improved workability




▶ Thread tightness can be kept same, even the multi-level of material.

Double tension provided as : standard




Single or Double can be set easy through Multi-functional 6-string switch, regarding the machine with trimmer.
(Available for more thick material)

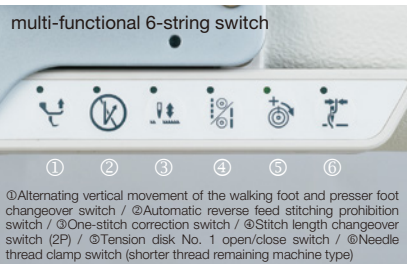Multi-functional 6-string switch (thread trimming switch)



In addition to the one-touch type reverse feed switch, a multi-functional 6-string switch is also provided. Changeover of the amount of the alternating vertical movement of the walking foot and the presser foot and changeover of the stitch length can be done simply with this one switch.

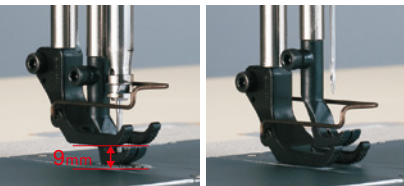Walking-foot/presser-foot alternating vertical movement mechanism



The sewing machine has adopted a feed mechanism which keeps the ratio between the amount of the vertical movement of the walking foot and that of the presser foot constant even when the material is changed. The amount of the alternating vertical movement of the walking foot and the presser foot is 9 mm at the maximum. This amount can be set with ease by means of the large dial installed on the upper section of the sewing machine.

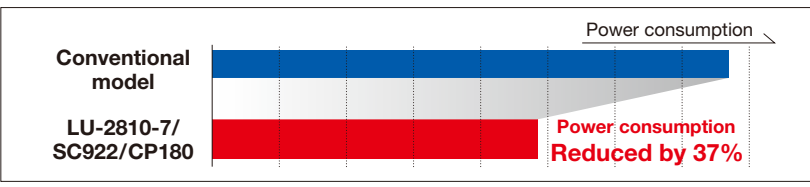
Mechanisms have been designed taking maintainability and

High-torque direct-drive motor is installed.



The direct-drive motor system has been adopted by all of the sewing machines with a thread trimmer. As a result, the sewing machine starts up swiftly and promises increased stop accuracy, thereby demonstrating improved responsiveness. In addition, the machine is no longer provided with a V-belt. This means that the adoption of the direct-drive motor is also effective in the elimination of belt shavings. Power is directly transmitted from the motor to the sewing machine, thereby contributing to reduced power consumption. (This sewing machine reduces power consumption by 37% as compared with the conventional models.) Adoption of a direct-driven main shaft and a revamping of mechanism design contribute to remarkably reduced noise. Noise has been reduced by 3.5dB as compared with the conventional model to produce this operator-friendly machine.


The sewing machine provided with a thread trimmer has adopted a high-torque direct-drive motor which is suitable for heavy-weight materials. As a result, the sewing machine is excellent at its responsiveness and ensures increased penetration into the material even when sewing multi-layered parts.



environmental friendliness into consideration.


Dramatically advanced availability for material

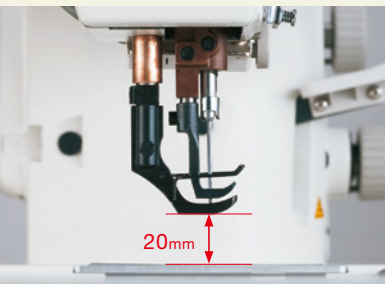Higher lift of the presser bar




A presser bar height of 20 mm is achieved when using the automatic presser bar lifting lever. Thanks to this feature, the process of joining leather and heavy-weight sponges, which are usually used as materials for expensive sofas, can be carried out with ease.

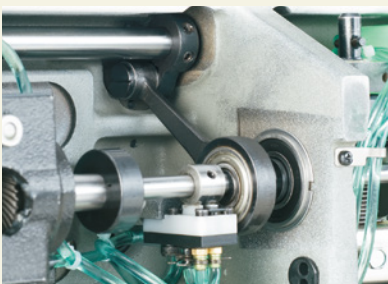Eccentricity of the feed driving cam is adjustable.



Adjustment of the eccentricity of the feed driving cam has been enabled. As a result, the sewing machine is able to perform sewing with the feed that is best-suited to the material and thread used. It is no longer necessary to prepare other subclass model sewing machines.

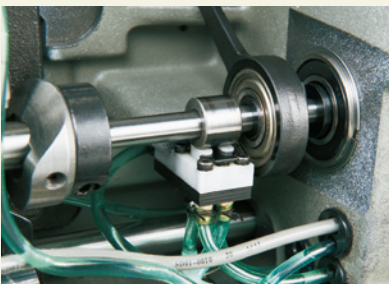New lubrication system



Lubrication system is powerful and stable even low speed.

New bobbin thread spool device



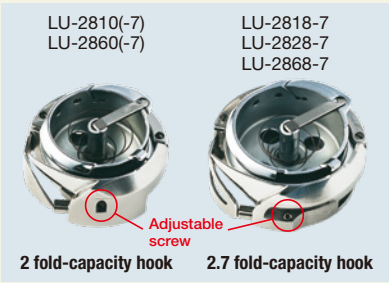
New bobbin thread spool device is no necessity of rolling thread manually.

Stitch length can be changed over among different lengths.



The sewing machine with a thread trimmer is provided as standard with a 2-pitch dial. One unit of this sewing machine is able to sew different sewing lengths since the sewing length can be instantaneously changed over.

2.0 / 2.7 fold-capacity hook



The hook which can be adjusted with screw amount of needle guard contact to needle. The needle guard can be easily adjusted. Therefore, it prevents stitch skipping and wear of hook edge.

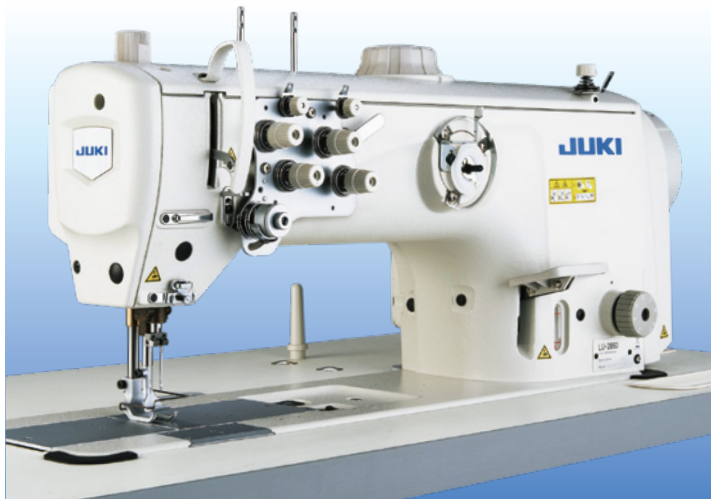
LU-2810

Semi-dry, 1-needle, Unison-feed, Lockstitch Machine with Vertical-axis 2.0 Fold-Capacity Hook

LU-2860

Semi-dry, 2-needle, Unison-feed, Lockstitch Machine with Vertical-axis 2.0 Fold-Capacity Hook

High and semi-long arm has been adopted. Wide machine bed area contributes to improved workability. Direct-drive, unison-feed, Lockstitch machine with a vertical-axis large hook providing substantially improved functions and performance.



LU-2860

LU-2828A-7

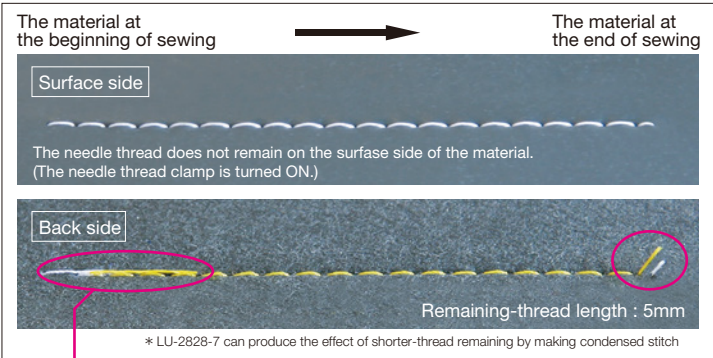
Semi-dry Direct-drive, 1-needle, Unison-feed, Lockstitch Machine with Vertical-axis 2.7 Fold-Capacity Hook (needle thread roll-in and shorter - thread remaining type)

The shorter-thread remaining type LU-2828A-7 is a high-performance sewing machine. It leaves a shorter thread on the material at the beginning of sewing by means of the needle thread clamp device, as well as at the end of sewing by means of the thread trimmer which is provided with a shorter-thread remaining function. This means that manual thread nipping both at the beginning and at the end of sewing is no longer required, thereby helping reduce operator fatigue. Thanks to the adoption of a 2.7-fold hook, the frequency of bobbin thread changing is reduced and workability is improved.



LU-2828-7

Beautiful finished seams




Needle thread clamping device
This device pulls the needle thread into the wrong side of the material at the beginning of sewing, thereby ensuring more beautifully-finished seams.

The shorter-thread trimming mechanism

(needle thread roll-in and shorter-thread remaining type)

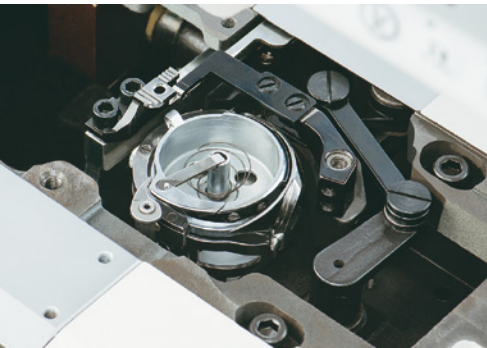The thread trimming mechanism has been completely renewed. The industry's shortest remaining thread length achieved by trimming the thread close to the fixed knife at the last stitch (condensed stitch). (The length of remaining needle thread is 5mm)



LU-2810-7

Semi-dry Direct-drive, 1-needle, Unison-feed, Lockstitch Machine with Vertical-axis 2.0 Fold-Capacity Hook with automatic thread trimmer

LU-2860-7

Semi-dry Direct-drive, 2-needle, Unison-feed, Lockstitch Machine with Vertical-axis 2.0 Fold-Capacity Hook with automatic thread trimmer

High and long arm has been adopted. The machine is suited to the sewing of car seats, sofas and bags. It is a sewing machine provided with dramatically improved workability and functions which are required for sewing large products and extra heavy-weight materials.



LU-2810-7

LU-2818AL-7

Semi-dry Direct-drive, 1-needle, Unison-feed, Lockstitch Machine with Vertical-axis 2.7 Fold-Capacity Hook with automatic thread trimmer (long-pitch type)

LU-2868AL-7

Semi-dry Direct-drive, 2-needle, Unison-feed, Lockstitch Machine with Vertical-axis 2.7 Fold-Capacity Hook with automatic thread trimmer (long-pitch type)

This model is the most-desired sewing machine for sewing furniture such as sofas. It is best-suited to topstitching with a long stitch pitch. During the topstitching process, the longer distance from the machine arm to the bed, in particular, effectively demonstrates the machine's improved workability.



LU-2868AL-7

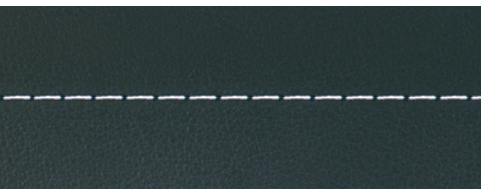
Long-pitch

Long pitch sewing is suitable for decoration sewing of furniture etc.

Long-pitch
(The maximum stitch length is 12mm at the pitch dial.)



General stitch length is 6 mm.



2.7 fold-capacity hook

With the adoption of this vertical-axis 2.7 fold-capacity hook, the frequency of bobbin thread winding is reduced, promising sewing work of increased efficiency. The hook which can be adjusted with screw amount of needle guard contact to needle.





1-needle type

(Gauge for europe)

List of gauges for the LU-2800A


	Throat plate	Feed dog	Walking foot	Presser foot	Slide plate of left	Slide plate of right	Front bed slide
Model							
LU-2810A	40112211	40133272	10711653	10712552	40112224	40142215	40147918
LU-2810A-7	40126350					40112225	
LU-2818AL-7	40147949					40147944	
LU-2828A-7	40147939					40127056	





Optional walking foot for the LU-2800A

Size (mm)	Piping		Piping	
	Walking foot	Presser foot	Walking foot	Presser foot
				
3mm	10745354	10747350	10746352	10747350
4mm	10745453	10747459	10746451	10747459
5mm	10745552	10747558	10746550	10747558
6mm	10745651	10747657	10746659	10747657

* For general piping

* The needle position with respect to the pipe is adjustable.

Right single-sided presser for sewing material edges		Left single-sided presser for sewing material edges		Wider type with increases efficiency of feed	
Walking foot	Presser foot	Walking foot	Presser foot	Walking foot	Presser foot
					
10711851	10712859	10711950	10712958	10712057	10713055

For multi-layered sections Dual-purpose type for both multi-layered sections and flat sections of material		For multi-layered sections with a smoother feed of both multi-layered and flat sections of material		For heavy-weight sponges Suitable for highly resilient materials	
Walking foot	Presser foot	Walking foot	Presser foot	Walking foot	Presser foot
					
10711653 (Standard)	10758456	10711653 (Standard)	10712651	10711752	10712750

Feed dog for the LU-2810NA(-7)


Feed dog

LU-2810NA(-7)
40260020
2.5×3.5 width 7.7

Optional feed dog for the LU-2810A

Feed dog	
	
LU-2810A (-7)	LU-2818A-7
40133273	40133272
2.5×3.5 width 7.7	2.2×3.3 width 7.7
40125925	40125925
2.5×3.5 width 7.7 Chamfered by an angle of 60 degrees	2.5×3.5 width 7.7 Chamfered by an angle of 60 degrees

Side plate with a window for the LU-2810A

Side plate with window	
	
LU-2810A (-7)	LU-2818AL-7 LU-2828A-7
40133312	40155087

1-needle type


(Standard gauge)




List of gauges for the LU-2800S





	Throat plate	Feed dog	Walking foot	Presser foot	Slide plate of left	Slide plate of right
Model						
LU-2810S	40112212	40133270	40143061	21350152	40112224	40142215
LU-2810S-7	40126349					40112225

Optional walking foot for the LU-2810S

Size (mm)	Piping		Piping		Piping	
	Walking foot	Presser foot	Walking foot	Presser foot	Walking foot	Presser foot
						
3.9mm (5/32)	B1478245000	B15302450AC	—	—	B147424500C	B15272450AC
4.8mm (3/16)		B15302450AD	B147924500D	B15312450AD	B147424500D	B15272450AD
6.4mm (1/4)		B15302450AF	B147924500F	B15312450AF	B147424500F	B15272450AF
7.9mm (5/16)		B15302450AH	B147924500H	B15312450AH	B147424500H	B15272450AH
9.5mm (3/8)		B15302450AK	—	—	B147424500K	B15272450AK

Toothed		Toothed		Toothed	
Walking foot	Presser foot	Walking foot	Presser foot	Walking foot	Presser foot
					
10338309	B1525563SA0	B147624500A	B15292450AA	B1470562B00	B1525562BA0

For tape sewing (toothed type for horizontal feed)		For horizontal feed		Slotted	
Walking foot	Presser foot	Walking foot	Presser foot	Walking foot	Presser foot
					
MAQ09307000	MAQ093080A0	MAN10452000	MAQ093080A0	B1470245000	B15242450A0


Slotted		Slotted		Single-sided wider type	
Walking foot	Presser foot	Walking foot	Presser foot	Walking foot	Presser foot
					
40041246	40041243	D1470241E0A	B1525241HA0	10325306	10325157

Feed dog for the LU-2810NS(-7)

Feed dog

LU-2810NS(-7)
40278158
2.5×3.5 width 6.2

Optional feed dog for the LU-2810S

Feed dog	
	
LU-2810S (-7)	
40133271	40125921
2.5×3.5 width 6.2	2.5×3.5 width 6.2 Chamfered by an angle of 60 degrees

Side plate with a window for the LU-2800S

Side plate with window(Right)

LU-2810S (-7)
40133312

ATTACHMENTS

Suspended ruler H152

Description	Parts No.
Suspended ruler (asm.) H152	MAH-152010A0
Screw	SM6061402TP ×2

SPECIFICATIONS

Model name	LU-2810 LU-2810N	LU-2860 LU-2860N	LU-2810-7 LU-2810N-7	LU-2860-7 LU-2860N-7
Type	1-needle	2-needle	1-needle with automatic thread trimmer	2-needle with automatic thread trimmer
Max. sewing speed	3,000sti/min*	2,700sti/min*	3,000sti/min*	2,700sti/min*
Max. stitch length	9mm			
Stitch length dial	1 pitch dial		2 pitch dial	
Presser foot	Auto: 20mm, By hand: 10mm			
Auto lifter	Option		Provide as standard	
Alternating vertical movement	1~9mm			
Alternating vertical movement adjusting method	Large dial			
DL device	—		Provide as standard	
Needle thread tension	Double-tension		Single/Double-tension	
Hook	Vertical axis 2 fold-capacity hook			
Bottom-feed micro-adjustment mechanism	Provided as standard			
Needle	135×17 Nm160 (Nm125~Nm180)			
Thread	#30~#5, B46~B138, Nm=60/3~20/3			
Lubrication	Semi-dry head automatic (Tank system)			
One-touch type reverse feed switch	—		Provide as standard	
Hand switch	—		Multi-functional 6-string switch	
Safety mechanism	Provided as standard (reset with the push of a button)			
Power requirement / Power consumption	—		Single-phase 100~120V / 200~240V , 3-phase 200~240V / 180VA (with automatic thread trimmer)	
Machine head weight	56kg	61kg		66kg

* "sti/min" stands for "Stitches per Minute."

Model name	LU-2818AL-7 LU-2818NAL-7	LU-2868AL-7	LU-2828A-7 LU-2828NA-7
Type	1-needle, Vertical-axis 2.7 Fold-Capacity Hook with automatic thread trimmer (long-pitch type)	2-needle, Vertical-axis 2.7 Fold-Capacity Hook with automatic thread trimmer (long-pitch type)	1-needle, Vertical-axis 2.7 Fold-Capacity Hook with automatic thread trimmer (needle thread roll-in and shorter - thread remaining type)
Max. sewing speed	3,000sti/min*	2,700sti/min*	3,000sti/min*
Max. stitch length	12mm		9mm
Stitch length dial	2 pitch dial		
Presser foot	Auto: 20mm, By hand: 10mm		
Auto lifter	Provide as standard		
Alternating vertical movement	1~9mm		
Alternating vertical movement adjusting method	Large dial		
DL device	Provide as standard		
Needle thread tension	Single/Double-tension		
Hook	Vertical axis 2.7 fold-capacity hook		
Bottom-feed micro-adjustment mechanism	Provided as standard		
Needle	135×17 Nm160 (Nm125~Nm180)		134×35 Nm140 (Nm125~Nm180)
Thread	#30~#5, B46~B138, Nm=60/3~20/3		
Lubrication	Semi-dry head automatic (Tank system)		
One-touch type reverse feed switch	Provide as standard		
Hand switch	Multi-functional 6-string switch		
Safety mechanism	Provided as standard (reset with the push of a button)		
Power requirement / Power consumption	Single-phase 100~120V / 200~240V , 3-phase 200~240V / 180VA (with automatic thread trimmer)		
Machine head weight	66kg	68kg	62kg

* "sti/min" stands for "Stitches per Minute."

WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows:

without automatic thread trimmer

Machine head

[1-needle type]

Gauge type	Code
Standard gauge	S
Gauge for europe	A

LU2810□□S

Application	Code	Alternating vertical dial	Code
Standard	—	Provided	S
For heavy weight materials	N		

[2-needle type]

Application	Code	Gauge type	Code	Alternating vertical dial	Code
Standard	—	Standard gauge	S		
For heavy weight materials	N	Gauge for europe	A	Provided	S

LU2860□□□S

* In case of "S" type in Gauge type, please choose from below.

Needle Gauge	Code
3.2mm	C
4.8mm	D
6.4mm	F
7.9mm	H
9.5mm	K
12.7mm	L

* In case of "A" type in Gauge type, please choose from below.

Needle Gauge	Code
4mm	A
6mm	B
8mm	C
10mm	D
12mm	E
Not provided	Z

* Needle gauge "Z" can be selected only for European specifications.

with automatic thread trimmer

Machine head

[1-needle type]

Head type	Code
Standard type	10
2.7 fold-capacity hook and long-pitch type	18
2.7 fold-capacity hook, needle thread roll-in and shorter - thread remaining type	28

Application	Code	Gauge type	Code
Standard	—	Standard gauge	S
For heavy weight materials	N	Gauge for europe	A

* LU-2818 can be select only "AL".
* LU-2828 can be select only "A".

LU28□□□□□70BBS

Wiper and one-touch type reverse feed		Code	Automatic foot lifter	Code	Alternating vertical dial	Code
Wiper	One-touch type reverse feed		Provided (pedal-driven)	B	Provided	S
Not provided	Provided	0B				

[2-needle type]

Head type	Code	Application	Code
Standard type	60	Standard	—
2.7 fold-capacity hook and long-pitch type	68	For heavy weight materials	N

* Head type "68" can be select only "—".

* LU-2868 can be select only "AL".

LU28□□□□□□70BBS

* In case of "S" type in Gauge type, please choose from below.

Needle Gauge	Code
3.2mm	C
4.8mm	D
6.4mm	F
7.9mm	H
9.5mm	K
12.7mm	L

* This code can be select only LU-2860.

* In case of "A" and "AL" type in Gauge type, please choose from below.

Needle Gauge	Code
4mm	A
6mm	B
8mm	C
10mm	D
12mm	E

* LU-2868AL cannot be select only "A".

Wiper and one-touch type reverse feed		Code
Wiper	One-touch type reverse feed	
Not provided	Provided	0B

Alternating vertical dial	Code
Provided	S

Control box

SC922B□

Power supply	Code
Single-phase 100~120V	S
3-phase 200~240V	D
Single-phase 200~240V (for general export)	K
Single-phase 200~240V (for ce)	N
Single-phase 200~240V (for china)	U

Operation panel

CP18C
CP180C